

UPRIGHT REACH-IN REFRIGERATOR

Top Mounted Condensing Unit



ES – Series Model : ESR1

WARRANTY

5 YEAR Compressor

3 YEAR Parts & Labor



Operating temperature range is 33°F ~ 54°F

Contact

201 W. Artesia Blvd, Compton, CA 90220
 T. (310) 323-6586, (800) 444-6285 F. (310) 323-7524, (310) 761-1127



Please visit our website for updated Energy Efficiency information

Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished top, bottom and back wall of exterior. ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes) with additional front weight support legs. Door heater installed around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Self-contained condensing unit located at top of cabinet for high performance
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-134A refrigerant
- Adjustable, time initiated defrost cycle of 3 to 12 hours with 350 watt defrost heater, both time and temperature terminated for fail-safe operation
- Automatic evaporator fan motor delay after defrost cycle
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Exterior anodized aluminum drain pan for self sufficient condensation removal
- Pressure relief ports for rapid cabinet re-entry
- Interior airflow backguard to ensure proper air circulation
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Door

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Rounded corners for a sleek and modern appearance
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handle for a flat surface
- Door lock
- Field reversible door

Lighting

- Shielded incandescent interior lighting

Shelving

- Three epoxy coated wire shelves
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 33°F to 54°F
- Easy to read digital temperature display
- Easy to program push button temperature control
- Microchip digital control and monitoring system with a variety of functions to monitor and maintain optimum temperature

Model	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight	Exterior Dimensions		
									L	D	H*
ESR1	1	23	1/3	R-134A	3	115-60-1	5.25	297lbs (134.7kg)	29 1/4" (740 mm)	31 5/8" (803 mm)	74 1/4" (1885 mm)

Disclaimer: Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.

*Height does not include 5" for casters

UPRIGHT REACH-IN REFRIGERATOR

Top Mounted Condensing Unit



EVEREST
REFRIGERATION
www.EVERESTref.com

ES – Series Model : ESR1

DIMENSIONAL DATA	
Net capacity cu. ft. 23 (651.3 cu l)	
Exterior (mm)	Length Overall in. 29 1/4" (740)
	Depth Overall in. 31 5/8" (803)
	Height Overall in.* 74 1/4" (1885)
Interior (mm)	Length Overall in. 24" (610)
	Depth Overall in. 26 3/4" (680)
	Height Overall in. 57" (1450)
Crated Weight	297lbs (134.7kg)
# of Doors	1
# of Shelves	3
Shelf Size Length x Depth in. (mm)	23 1/4" x 24" (590 x 610)
ELECTRICAL DATA	
Voltage	115-60-1 (V-Hz-Ph)
Full load amperes	5.25
Feed wires with Ground	3
Cord Length ft.	9
REFRIGERATION DATA	
Refrigerant	R-134A
Compressor H.P.	1/3 HP
BTU/HR† (Kcal/h)	2555 (644)




Specifications subject to change without notice.

- *: Height does not include 5" for casters.
 †: Based on evaporating temperature of 23°F(-5°C) & Condensing temperature of 131°F(55°C).

Equipped With One NEMA 5-15P Plug



Dimensions (mm)

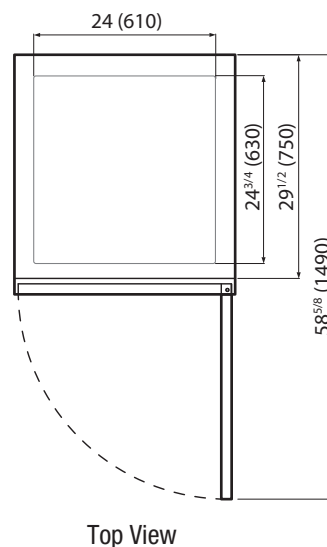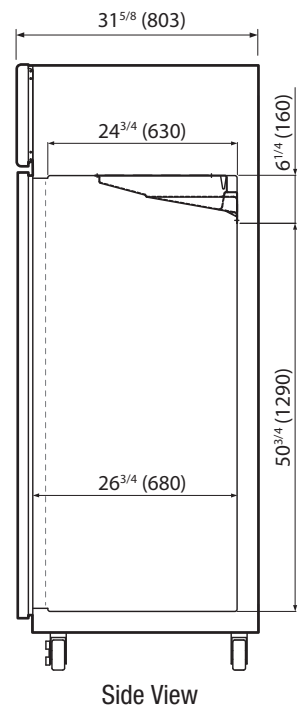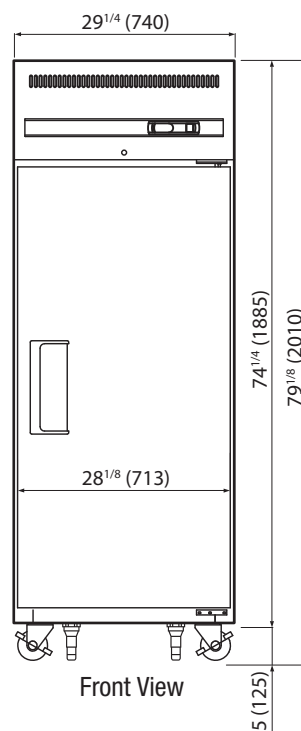

ABS legs

Two additional front adjustable stainless steel clad ABS legs to provide extra stability when opening and closing door.



- Project / Customer _____
- Item No. _____
- Quantity _____



Warranty
 5 Year — Compressor Warranty
 3 Year — Parts & Labor Warranty



Contact
 201 W. Artesia Blvd, Compton, CA 90220
 T. (310) 323-6586, (800) 444-6285
 F. (310) 323-7524, (310) 761-1127